

AFC-CCM

Atomflo™ Coolant Control Module

The Coolant Control Module is a closed-loop water circulation system that maintains plasma source temperature during plasma cleaning. Actively cooling the plasma source improves plasma stability and prevents thermal damage to the substrate.

AFC-CCM features include:



- Real-time temperature monitoring and control.
- Heating and cooling.
- Integration with Atomflo™ controller for automated temperature control.
- Ethernet output of set point and process temperature (via Atomflo™ controller).



For more information, contact Surfx at:
sales@surfxtechnologies.com or +1 310 558 0770.

Facilities and Dimensions

Specifications	
Power supply	200 – 240 VAC, 8 A, 50/60 Hz
Coolant	Distilled water (~1.0 L)
Typical operating temperature	60° C
Dimensions (W*D*H)	437 x 650 x 143 mm (17.2 x 25.6 x 5.6 inches)
Weight	11.3 kg (28 lbs)

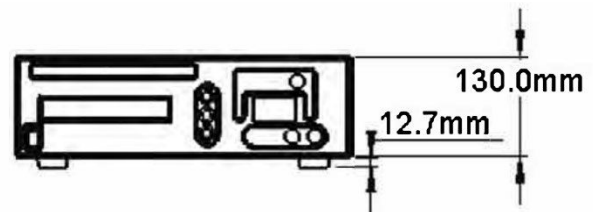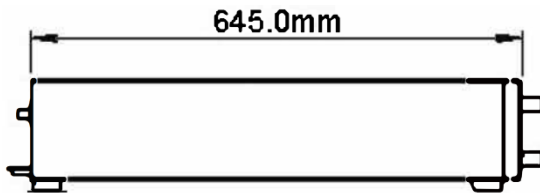

www.surfxtechnologies.com

North America

Surfx Technologies, LLC
Los Angeles, CA, USA
Ph: +1 (310) 558-0770
sales@surfxtechnologies.com

Asia

Surfx Technologies Taiwan Co. Ltd.
Taichung City, Taiwan
Ph: +886 4 2263 8200
salesasia@surfxtechnologies.com